

Performa® Series Proximity Plus® Cards and Key Tags



Globally accepted 13.56 MHz operating frequency
Compatibility with Sielox's Performa® readers
Pre-programmed customer-specific ID numbers
Available in clamshell or graphics-quality direct print

AC-12 Series

Sielox's Performa® Proximity Plus® cards set the standard for performance and cost-effective solutions for access control. Utilizing the globally accepted frequency of 13.56 MHz ensures compatibility with Sielox's Performa® readers.

Sielox's innovative flipchip assembly design provide for the highest reliability proximity cards available. Performa Proximity Plus cards utilize a passive, no-battery design allowing for an infinite number of reads.



Clamshell



Graphics-Quality
Direct Print



Key Tag

Performa® Series Proximity Plus® Cards and Key Tags

Product Specifications

Typical Read Range

Up to 5" with Performa® Proximity Switch Plate Reader (13 cm)

Up to 4" with Performa® Proximity Mullion Mount Reader (10 cm)

Operating Temperatures

-4°F to + 158°F

20°C to + 70°C

Model Numbers

AC-12 (Clamshell)

AC-12P (Graphics-Quality Direct Print)

AC-12M (Graphics-Quality Direct Print w/Magnetic Stripe)




AC-12T (Key Tag)



2.12"
Clamshell



2.12"
Graphics-Quality
Direct Print
(also available with
Magnetic Stripe)

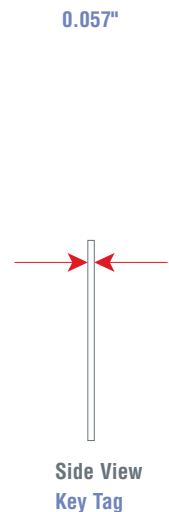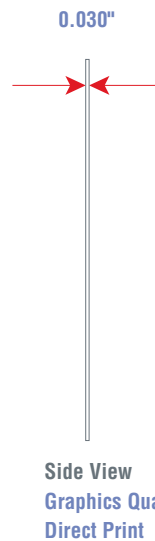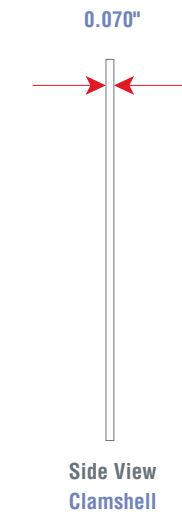

1.770"
Key Tag

3.37"

1.182"

Sielox

Sielox
170 E 9th Ave
Runnemede, NJ 08078

800-424-2126 Toll Free
856-939-9300 Phone
856-939-9309 FAX
www.sielox.com